
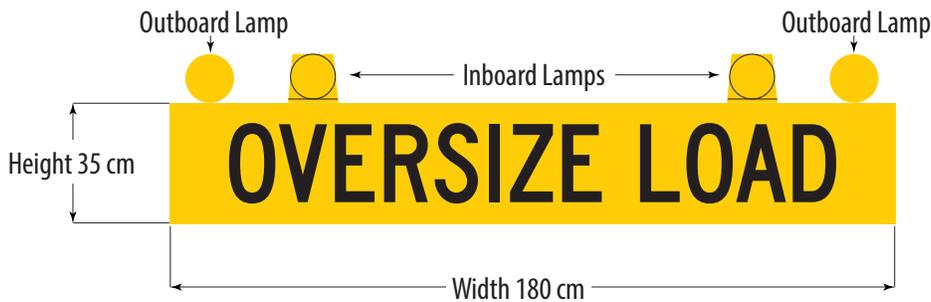


## APPENDIX K


### Pilot Car Signs

**LAMP INFORMATION FOR ALL SIGNS**

- Round amber lamps (section 8.04[6](a)) must be in the outboard positions. If four round amber lamps are used, they must be in the inboard and outboard positions.
- Rotating or strobe amber lamps (section 8.04[6](b)), if used, must be in the inboard positions.
- Lamps in the outboard positions must be in operation when escorting a load. Lamps in the inboard positions may be in operation only while engaged in traffic control or in inclement weather until the load can be safely positioned off of the highway.
- All dimensions shown are in centimeters.

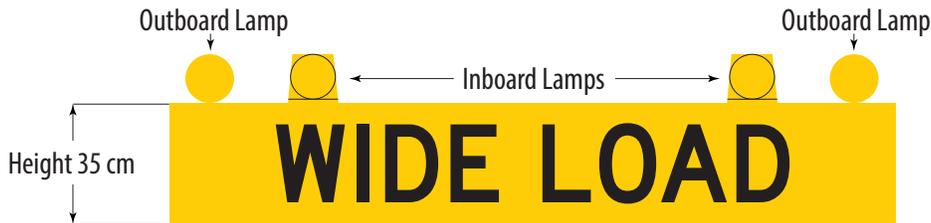

**FONT HEIGHT:** 28 cm\*  
**STROKE:** 4 cm  
**COLOUR:** Black/Yellow  
 Shaded areas are YELLOW  
 Black areas are BLACK  
 \* Font height may be 20cm if C Series lettering is used, as set out under the US Federal Highway Administration Manual on Uniform Traffic Control Devices, as amended from time to time.

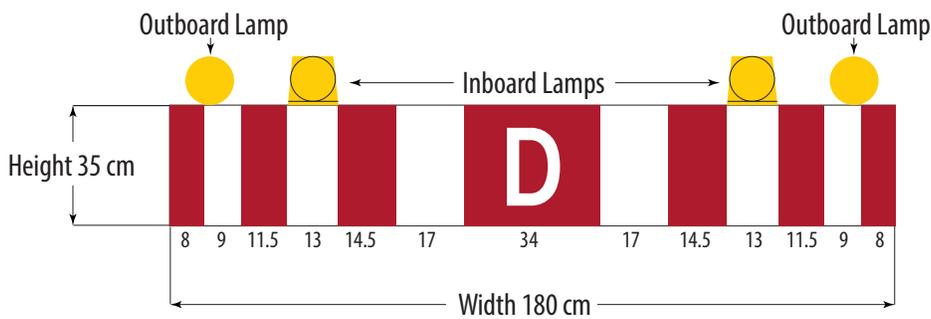

**FONT HEIGHT:** 20 cm  
**COLOUR:** White/Red  
 Shaded areas are RED  
 Unshaded areas are WHITE  
 Letter "D" must be 20 cm in height and have a nominal 3 cm stroke or E Series lettering, as set out under the US Federal Highway Administration Manual on Uniform Traffic Control Devices, as amended from time to time.