

APPENDIX E

Commercial Transport Regulations (CTR)

TRUCK AND PONY TRAILER COMBINATION

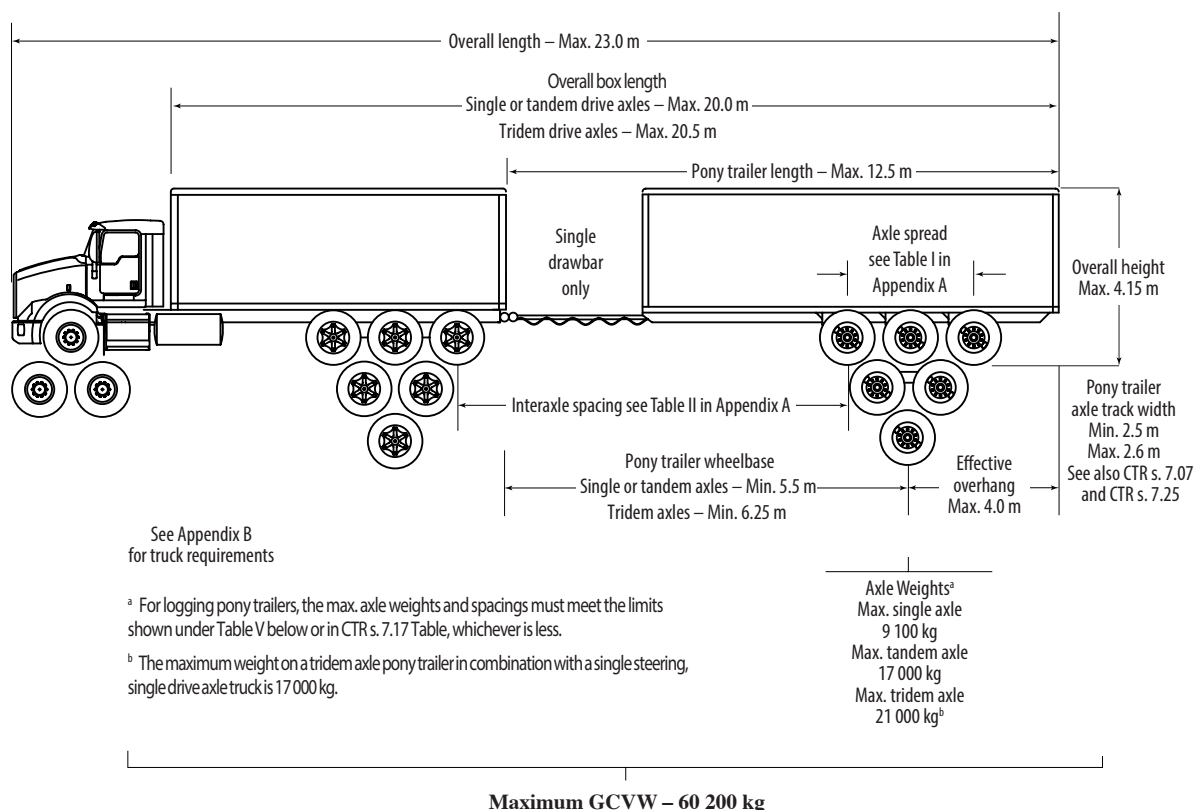


Table V: Pony Trailer Weights

Total Number of Axles in the Combination	Single Steering/ Single Drive Axle	Single Steering/ Tandem Drive Axle	Tandem Steering/ Tandem Drive Axle	Single Steering/ Tridem Drive Axle	Tandem Steering/ Tridem Drive Axle
3	Max. 9 100 kg	—	—	—	—
4	Max. 17 000 kg	Max. 9 100 kg	—	—	—
5	Max. 17 000 kg	Max. 17 000 kg	Max. 9 100 kg	Max. 9 100 kg	—
6	—	Max. 21 000 kg	Max. 17 000 kg	Max. 17 000 kg	Max. 9 100 kg
7	—	—	Max. 21 000 kg	Max. 21 000 kg	Max. 17 000 kg
8	—	—	—	—	Max. 21 000 kg

Notes:

1. A maximum of 100 kg/cm of tire width is applicable to all tires, except for wide base single tires on the single steering axle.
2. A maximum of 4 550 kg/wide base single tire and 3 000 kg/tire for all others is applicable to all tires.
3. Dimensional limits for the pony trailer, other than the max. overall length, max. overall width, and max. overall height are not applicable when the pony trailer has a GVWR of less than 10 000 kg.

Abbreviations

CTR	Commercial Transport Regulations
GCVW	Gross Combination Vehicle Weight
GVWR	Gross Vehicle Weight Rating
PME	Permanently Mounted Equipment