


## APPENDIX C

### Commercial Transport Regulations (CTR)

#### Bus, Motor Home, or Recreation Vehicle

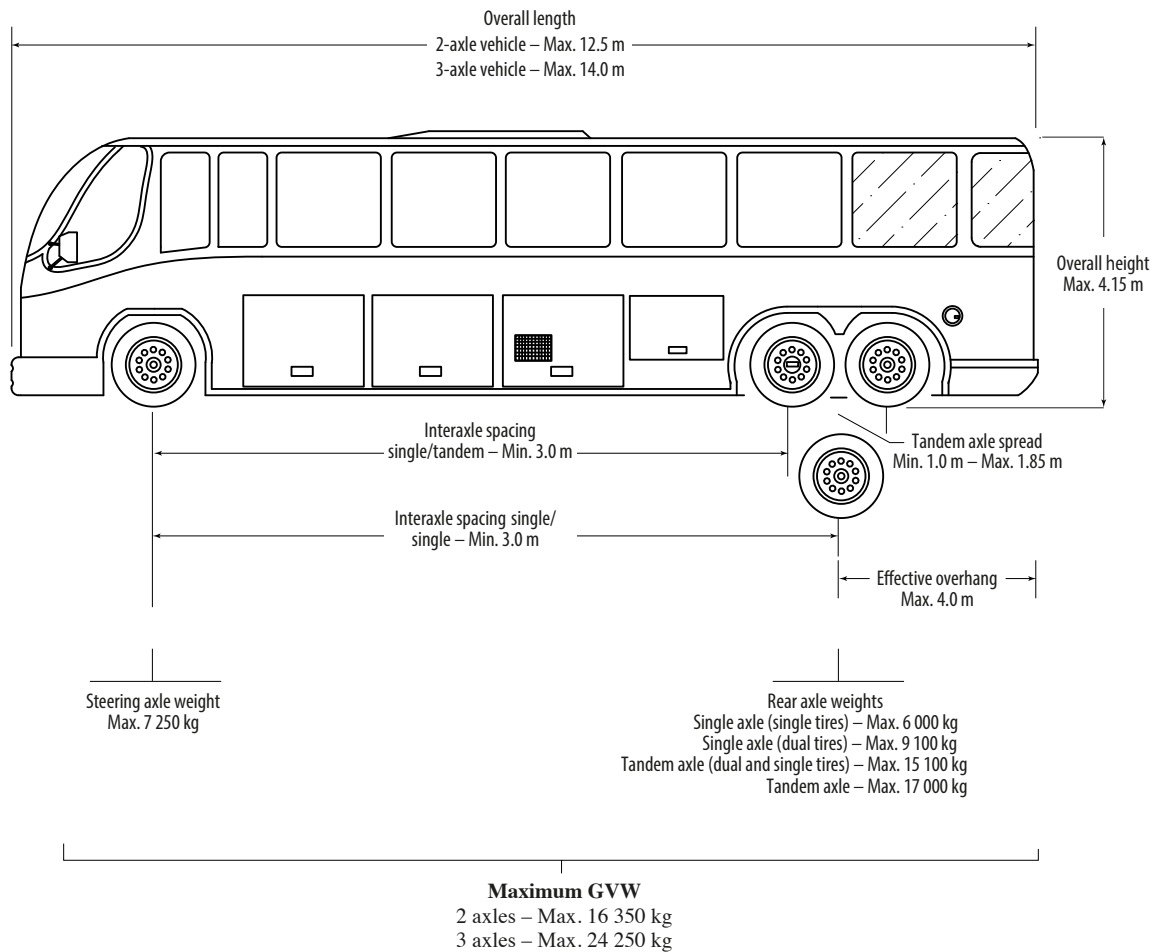

#### Notes:

1. If there is more than one axle at the rear of the bus, the load carried by the group must be distributed between axles in a ratio corresponding to the number of tires on each axle.
2. A maximum of 100 kg/cm of tire width is applicable to all tires, except for wide base single tires on the single steering axle.
3. A maximum of 4 550 kg/wide base single tire and 3 000 kg/tire for all others is applicable to all tires.
4. For length specifications regarding articulated buses, see CTR s. 7.08 (4).
5. For axle track width requirements for wide base single tires, see CTR s. 7.25.

Abbreviations	
<b>CTR</b>	Commercial Transport Regulations
<b>GVW</b>	Gross Vehicle Weight