

Item and Method of Inspection	Reject If
<b>1. Hood or Engine Enclosure</b>	<b>Truck   ✓   Trailer     Bus   ✓  </b>
<p>Additional Inspection Procedure(s): Test the operation of the hood or engine enclosure doors, attachment, latches and safety devices.</p> <p>a) condition</p> <p>b) latch (primary and secondary)</p> <p>c) safety cable, assist spring, support/dampener</p> <p>d) hinge and support spring</p>	<p>a) damaged, insecure, or deteriorated in a manner that it is likely to become detached or missing.</p> <p>b) broken, inoperative, insecure mounting, missing or seized</p> <ul style="list-style-type: none"> <li>– effectiveness is compromised due to deteriorated condition(e.g.: rubber or similar type of latch)</li> <li>– fails to open or close normally</li> <li>– welded or repaired in a way that does not meet OEM standard</li> </ul> <p>c) broken, insecurely attached or missing</p> <p>d) hinge or hinge part is broken, cracked, missing, seized or abnormally worn</p>
	<p><b><u>OUT OF SERVICE</u></b></p> <p><b>i) Both primary and secondary latch are inoperative.</b></p>
<b>2. Tilt Cab</b>	<b>Truck   ✓   Trailer     Bus    </b>
<p>Additional Inspection Procedure(s): Test the operation of the tilt cab operation, its attachment, latches and safety devices.</p> <p>a) latch (primary and secondary)</p> <p>b) hinge</p>	<p>a) broken, insecure mounting, missing or seized</p> <ul style="list-style-type: none"> <li>– fails to open or close normally</li> <li>– welded or repaired in a way that does not meet OEM standard</li> </ul> <p>b) hinge or hinge part is broken, cracked, missing, seized or abnormally worn</p> <ul style="list-style-type: none"> <li>– parts do not align correctly</li> </ul>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
	<b><u>OUT OF SERVICE</u></b>  i) <b>Latch fails to secure the cab (latch is incapable of holding cab from moving forward).</b>
<b>3. Air-Suspended Cab</b>	<b>Truck   ✓   Trailer     Bus    </b>
<p>Additional Inspection Procedure(s): Check the cab with air system at normal operating pressure.</p> <p>a) air bag</p> <p>b) air line, connection and fitting</p> <p>c) mount, rod and attachment</p> <p>d) pressure protection valve</p> <p>e) height control valve</p> <p>f) shock absorber</p>	<p>a) leaking, cracked to reinforcing layer, damaged or patched</p> <p>– not properly inflating or cab tilts to one side</p> <p>b) fitting, line or repair method does not meet OEM or industry standard</p> <p>– tubing or hose is defective as defined in the chart on Appendix B</p> <p>– fitting or connection is broken, cracked, flattened or leaking</p> <p>– damaged in a way (such as: melting, flattening, deformation or kinking) that can restrict air flow</p> <p>c) bent, broken, loose or welded or repaired in a way that does not meet OEM standard</p> <p>d) missing or improper type, or does not meet OEM standard</p> <p>e) inoperative (as indicated by cab height being above or below its normal position)</p> <p>– equipped with a single valve which is not in OEM location, or not near centre of cab</p> <p>f) broken, damaged, disconnected, loose or missing</p> <p>– level 2 leak of oil</p>
	<b><u>OUT OF SERVICE</u></b>  i) <b>Any component is so insecure or loose that it is an imminent hazard or it could become detached from vehicle.</b>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Commercial Vehicle Safety and Enforcement – Vehicle Inspection Manual 2016 – Amended 2018 Page 291

Item and Method of Inspection	Reject If
	<p><b><u>OUT OF SERVICE</u></b></p> <p>i) Any component is so insecure or loose that it is an imminent hazard or it could become detached from vehicle.</p> <p>ii) Any section has exposed sharp edge, is torn or protrudes out in a manner that is hazardous to driver, passenger, pedestrian or cyclist.</p> <p>iii) Any body part or attachment is broken, cracked perforated, or sagging, in a manner that permits the body to contact any moving part.</p>
<b>5. Cargo Body</b>	Truck   ✓      Trailer   ✓      Bus
<p>Additional Inspection Procedure(s): Where any sheet metal, structural item or fastener is suspected of being loose or perforated, determine the integrity of the suspect item or area by lightly tapping it with a hammer.</p> <p><b>NOTE: Minor surface rust and corrosion is normal.</b></p> <p>a) sheet metal</p> <p>b) floor and deck</p>	<p>a) any section has exposed sharp edge, is torn or protrudes out in a manner that could be hazardous to driver, passenger, pedestrian or cyclist</p> <ul style="list-style-type: none"> <li>– panel is insecure, loose or corroded through</li> <li>– rivet is loose, missing</li> <li>– welded or repaired in a way that does not meet OEM standard</li> </ul> <p>b) has any condition that allows a person or cargo to fall through</p> <ul style="list-style-type: none"> <li>– has a hole larger than 200 mm across the longest dimension</li> <li>– welded or repaired in a way that does not meet OEM standard</li> </ul>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
c) frame and sub-frame	c) bulge caused by corrosion resulting in distortion of 10 mm or more (unless the condition or the repair is approved by the OEM, manufacturer or an engineer) <ul style="list-style-type: none"> <li>– stress crack at side rail or rub-rail</li> <li>– rivet is loose, missing, dimpled by corrosion</li> <li>– bent, broken, cracked or insecure</li> <li>– welded or repaired in a way that does not meet OEM standard</li> </ul>
d) cross-member	d) bent, broken, collapsed, cracked or missing <ul style="list-style-type: none"> <li>– perforated or weakened by corrosion</li> </ul>
e) inner or outer side rail and body-long sills	e) bulge caused by corrosion resulting in distortion of 10 mm or more (unless the condition or the repair is approved by the OEM, manufacturer or an engineer) <ul style="list-style-type: none"> <li>– rivet is loose, missing</li> <li>– bent, broken, cracked or insecure</li> <li>– welded or repaired in a way that does not meet OEM standard</li> </ul>
f) stake pocket/tie down, cargo securing point or cargo securing device	f) broken, cracked or insecure <ul style="list-style-type: none"> <li>– elongated or distorted</li> </ul> <p><b>NOTE: When a cargo securing point or device is in any of the conditions described above, record the condition on the inspection report. Do not reject the vehicle for this condition alone.</b></p>
g) tailgate, hopper, or end-dump door	g) broken, cracked or missing <ul style="list-style-type: none"> <li>– hinge is broken, cracked or missing, or pin lock is missing</li> <li>– insecure, or will not close and latch properly</li> <li>– any gap exists that would allow leakage, loss or spillage of cargo</li> <li>– welded or repaired in a way that does not meet manufacturer standard</li> </ul>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
h) body to frame attachment  <b>NOTE: Includes body to frame attachment device such as “U-bolt”, pivot hinge, cheek plate mount, flex-mount hardware, body clamp and “J-Bar”.</b>	h) bent, broken, cracked, loose or missing <ul style="list-style-type: none"> <li>– spring is broken</li> <li>– spacer or insulator is abnormally worn, crushed, dislodged or missing</li> </ul>
i) body rail and structural member	i) upper or lower cargo body rail is bent, buckled, has a crack longer than 25 mm, or has a fastener loose or missing <ul style="list-style-type: none"> <li>– floor cross member is bent, loose or sagging</li> <li>– roof support is bent, loose or sagging</li> </ul>
j) body panel	j) any section has exposed sharp edge, is torn or protrudes out in a manner that could be hazardous to driver, passenger, pedestrian or cyclist <ul style="list-style-type: none"> <li>– panel or panel fastener is insecure, loose, missing, or corroded through</li> <li>– rivet is loose</li> <li>– repaired in a way that does not meet OEM standard</li> <li>– any gap exists that would allow leakage, loss or spillage of cargo</li> </ul>
k) bunk and stake equipment	
i) bunks	i) broken, cracked, mounted insecurely, loose bolts, bunk lash exceeds 5 mm or OEM specifications
ii) bunk posts, stakes and extensions	ii) broken, cracked, insecure, loose bolts, angle exceeds 90°
iii) cup and saucer	iii) cracked, broken, worn beyond OEM
iv) stake cables	iv) less than 21 mm (7/8 in.), worn, frayed, pinched, anchor insecure, stake trip lever retainer missing, trip stake return spring missing or broken
v) bolster	v) loose, cracked, bolts loose, missing
vi) bunk air lock	vi) air leak, not functioning as per OEM

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
	<p><b><u>OUT OF SERVICE</u></b></p> <p>i) Any component is so insecure or loose that it is an imminent hazard or it could become detached from vehicle.</p> <p>ii) Any section has exposed sharp edge, is torn or protrudes out in a manner that is hazardous to driver, passenger, pedestrian or cyclist.</p> <p>iii) Any body part or attachment is broken, cracked perforated, or sagging, in a manner that permits the body to contact any moving part, or imminent collapse appears likely.</p> <p>iv) Any gap exists allowing leakage, loss or spillage of cargo.</p> <p>v) A cargo body upper or lower rail is buckled, bowed, cracked through, sagging or has two or more adjacent loose or missing fasteners.</p> <p>vi) Two or more adjacent floor cross members are bent, loose or sagging.</p> <p>vii) Two or more adjacent roof supports are bent, loose or sagging.</p>
<b>6. Trailer Body types</b>	Truck     Trailer   ✓   Bus
<p>a) low boy</p> <p>i) tie downs</p> <p>ii) loading ramp (if equipped)</p> <p>iii) equipment rails or pads (floor not required)</p> <p>iv) side rails (if equipped)</p>	<p>i) missing, broken, cracked, worn beyond load security specifications</p> <p>ii) hinges broken, insecurely mounted</p> <p>iii) loose, insecure</p> <p>iv) loose, cracked, broken, corroded through, insecure, improper or inadequate repair</p>
	<p><b><u>OUT OF SERVICE</u></b></p> <p>i) Any component is so loose or insecure that it could become disconnected from vehicle.</p>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
<p>b) timber/log/pole trailers</p> <p>Flooring not required.</p> <p>i) bunks/bunk lash <b>NOTE: All bolts must be torqued to OEM specifications.</b></p> <p>ii) bunk posts, stakes and extensions</p> <p>iii) cup and saucer</p> <p>iv) stake cables</p> <p>v) bolster</p> <p>vi) reach (entire length of reach must be inspected)</p> <p>vii) compensator</p> <p>viii) adjustable reach (trailers manufactured after January 1, 1993) – must be fully extended for inspection</p>	<p>i) broken, cracked, mounted insecurely, loose bolts, bunk lash exceeds 5 mm (3/16 in.) or OEM specifications</p> <p>ii) broken, cracked, insecure, loose bolts, angle exceeds 90°</p> <p>iii) cracked, broken, does not meet OEM standards</p> <p>iv) less than 21 mm (7/8 in.), worn, frayed, pinched, anchor insecure, stake trip lever retainer missing, trip stake return spring missing or broken</p> <p>v) loose, cracked, bolts loose, missing</p> <p>vi) cracked, worn more than 20%, bent, repairs do not meet OEM specifications</p> <p>vii) live (stops missing), bushings ineffective, cracked, welded, worn more than 20%</p> <p>viii) weld, bolts or positive means other than a friction clamp to prevent movement, missing</p>
	<p><b><u>OUT OF SERVICE</u></b></p> <p>i) <b>Any component is loose or insecure so that it could become disconnected from vehicle.</b></p>
<p>c) cattle liner</p> <p>i) sides</p>	<p>i) cracked, corroded through, severely corroded as to weaken the member (check by tapping with hammer)</p> <p>– rivets at drop center front and back are missing, loose, working</p>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.



Item and Method of Inspection	Reject If
ii) floor Particular attention should be given at drop center area.  iii) side supports (visually check inside)  iv) side rails	ii) cracked, corroded through, severely corroded as to weaken the member (check by tapping with hammer) – rivets at drop center front and back are missing, loose, working  iii) missing, broken, cracked, corroded through, corroded so as to weaken the support  iv) bulges indicating corrosion evident, stress cracks at rails – rivets dimpled, rivets missing (check by tapping rivets with hammer)
	<b><u>OUT OF SERVICE</u></b>  <b>i) Any component is so loose or insecure that it could become disconnected from vehicle.</b>
<b>7. Frame, Rails and Mounts</b> <div>Truck   ✓   Trailer   ✓   Bus   ✓  </div>	
a) condition  <b>NOTE: Some rust and corrosion on the outer surface of exposed metal parts is normal. When a high amount of rust or corrosion is present and visibly reduces the thickness of the material, structural deterioration is possible.</b>          b) frame fastener	a) welded, modified or repaired in a way that does not meet OEM standard – bent, broken or cracked – perforated or separated due to corrosion between mount and frame member – rusted or corroded to a depth sufficient to become weakened – bulge caused by corrosion resulting in distortion of 10 mm or more (unless the condition or the repair is approved by the OEM, manufacturer or an engineer) – any condition of the frame assembly allows a frame component, or a part of the body or power train, out of its normal position, or to contact a moving part  b) ineffective, loose or missing

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
<p>c) cross-member</p> <p>d) sub-frame assembly</p> <p><b>NOTE: This only applies to a structural frame assembly that is not part of the main frame assembly, and carries a load or provides strength to the vehicle structure, i.e.: engine cradle, or suspension sub-frame.</b></p>	<p>c) bent, broken, cracked, loose or missing</p> <ul style="list-style-type: none"> <li>– cut, notched, rusted or corroded to a depth sufficient to cause weakness</li> <li>– repaired using material or method, that does not meet OEM standard or industry standard</li> <li>– any condition of a cross member allows a frame component, or a part of the body or power train, out of its normal position, or to contact a moving part</li> </ul> <p>d) bent, broken, cracked, loose or missing</p> <ul style="list-style-type: none"> <li>– cut, notched, rusted or corroded to a depth sufficient to cause weakness</li> <li>– repaired using material or method that does not meet OEM standard or industry standard any condition of the sub-frame assembly allows a frame component, or a part of the body or power train, out of its normal position, or to contact a moving part</li> </ul>
	<p><b><u>OUT OF SERVICE</u></b></p> <p>i) <b>Any frame side-rail or cross-member is cracked as follows:</b></p> <ul style="list-style-type: none"> <li>– longer than 38 mm</li> <li>– longer than 25 mm in the bottom flange</li> <li>– from the web extending around the radius and into the bottom flange</li> </ul> <p>ii) <b>Any condition of the frame allows a frame component, or a part of the body or power train, to be more than 38 mm out of its normal position, or to contact a moving part.</b></p> <p>iii) <b>Imminent failure appears likely due to a frame member that is damaged or deteriorated, or has been repaired using material or method, that does not meet OEM standard or industry standard.</b></p>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
<b>8. Unitized Body Elements</b>	<b>Truck   ✓     Trailer   ✓     Bus   ✓  </b>
a) load carrying panel, bulkhead, structural element and mounts  <b>NOTE: Some rust and corrosion on the outer surface of exposed metal parts is normal. When a high amount of rust or corrosion is present and visibly reduces the thickness of the material, structural deterioration is possible.</b>	a) bent, broken, cracked, loose or missing or rusted or corroded to a depth sufficient to cause weakness <ul style="list-style-type: none"> <li>– welded or repaired in a way that does not meet OEM standard</li> <li>– any rivet is loose or missing</li> <li>– any condition of the unitized body allows a part of the body or power train, out of its normal position, or to contact a moving part</li> </ul>
	<b><u>OUT OF SERVICE</u></b>  i) <b>Any component is so insecure or loose that it could become detached from the vehicle.</b>  ii) <b>Structural body component has a crack, cut or notch longer than 38 mm.</b>  iii) <b>Any condition of a unitized body component allows a part of the body or power train to be more than 38 mm out of its normal position, or to contact a moving part.</b>  iv) <b>Imminent failure appears likely due to a body component that is damaged or deteriorated, or has been repaired using material or method, that does not meet OEM standard or industry standard.</b>
<b>9. Cab or Cargo door</b>	<b>Truck   ✓     Trailer   ✓     Bus    </b>
a) condition and operation  <b>NOTE: This includes a partition door between the occupant and cargo area.</b>	a) binds or fails to lock securely <ul style="list-style-type: none"> <li>– insecure mounting to hinge, insecure hinge or severely corroded in hinge area</li> <li>– panel is corroded through</li> <li>– welded or repaired in a way that does not meet OEM standard</li> <li>– door fails to operate or latch on both primary and secondary latches</li> <li>– gap exists that may allow exhaust gases to enter cab, passenger compartment, and/or sleeper</li> <li>– seal is out of position, damaged or missing, and is able to allow exhaust gases to enter cab, passenger compartment, and/or sleeper</li> <li>– any gap exists that would allow leakage, loss or spillage of cargo</li> </ul>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
b) interior and exterior door openers and handles	b) broken, inoperative or missing catch or latch is broken, loose or missing
	<b><u>OUT OF SERVICE</u></b>  i) Cab door fails to latch on both primary and secondary latches. ii) Cargo door fails to latch. iii) Gap exists and exhaust gases are entering cab, passenger compartment or sleeper. iv) Any gap exists allowing leakage, loss or spillage of cargo.

10. Cargo Tank or Vessel	Truck   ✓   Trailer   ✓   Bus
<p><b>NOTE:</b> Code, (e.g.: dangerous goods CSA B620, edible product, dry bulk) cargo tanks are frequently subject to additional inspection requirements. Inspections conducted in accordance with this standard address only a limited portion of the compliance requirements.</p> <p>This inspection does not include any procedure that requires operation of any valve, hatch or product handling item. Authorized inspector must take precautions to avoid exposure to any cargo or residual material.</p> <p>a) condition</p> <p>b) valve</p> <p>c) hose</p>	<p>a) welded or repaired in a way that does not meet OEM standard</p> <ul style="list-style-type: none"> <li>– loose on mounts</li> <li>– level 2 leak of any liquid transported by the tank or vessel</li> <li>– crack or broken weld in tank, frame or support</li> <li>– movement, bulge or weakness caused by corrosion between tank and frame</li> </ul> <p>b) cap loose or missing</p> <ul style="list-style-type: none"> <li>– level 2 leak of any liquid transported by the tank or vessel</li> </ul> <p>c) loose or improperly secured</p>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
d) hatch	d) insecure, loose or missing <ul style="list-style-type: none"> <li>– latch inoperative</li> <li>– hinge, broken or inoperative</li> </ul>
	<b><u>OUT OF SERVICE</u></b> <ul style="list-style-type: none"> <li>i) Any component is so insecure or loose that it could become detached from vehicle.</li> <li>ii) Required internal valve is missing.</li> <li>iii) Internal valve remains open when it is required to be closed.</li> <li>iv) Access/fill/inspection opening cover is improperly secured or missing.</li> <li>v) Required venting device, emergency device, or discharge valve, is missing.</li> </ul>

**11. Body, Device or Equipment Attached or Mounted to the Vehicle**

Truck | ✓ | Trailer | ✓ | Bus | ✓ |

**NOTE:** This section applies primarily to external devices or equipment attached to a vehicle. Examples include a crane, cargo lifting and transporting machine, load covering equipment, cargo dispensing equipment, Auxiliary Power Unit, refrigeration-heater (reefer) unit, generator, ready-mix unit, sander body, feed and grain body, snow plow, service/utility body, vacuum tank, flatbed, roll- on/roll-off, lugger, container chassis, etc.

The criteria in this section only apply to a mounted body, device or equipment to the extent that the condition could affect the safe operation of the vehicle on the highway. The functionality of the mounted equipment does not need to be tested or inspected.

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
<p>a) security and condition</p> <p>Additional Inspection Procedure(s): Check security of attached body, device or equipment visually, manually and using suitable tools as necessary. No functional test is to be conducted</p>	<p>a) equipment or device is in such an unsafe condition that is a risk to other motorists, the driver, a passenger, pedestrian or cyclist</p> <ul style="list-style-type: none"> <li>– equipment or device is insecure or loose, or in danger of shifting in a way that could impede normal operation of the vehicle</li> <li>– any section has an exposed sharp edge, is torn or protrudes out in a manner that could be hazardous to the driver, a passenger, pedestrian or cyclist</li> <li>– level 3 leak of any oil, hydraulic fluid or liquid product</li> </ul>
	<p><b><u>OUT OF SERVICE</u></b></p> <p>i) Any article, component or device is so insecure or loose that it could become detached from vehicle.</p> <p>ii) Equipment or device is in such an unsafe condition that is a risk to other motorists, the driver, a passenger, pedestrian or cyclist.</p> <p>iii) Any section has an exposed sharp edge, is torn or protrudes out in a manner that could be hazardous to the driver, a passenger, pedestrian or cyclist.</p>
<b>12. Refrigeration/Heater Unit Fuel System (Reefer or Auxiliary Power Unit [APU])</b> Truck   ✓      Trailer   ✓      Bus	
<p>a) fuel system</p> <p>i) cap(s)</p> <p>ii) tank(s)</p> <p>iii) tank mount(s)</p> <p>iv) strap(s)</p>	<p>i) missing, does not prevent spillage</p> <p>ii) leaking, insecurely mounted, cracked, broken welds, not designed for the storage of fuel, inferior vent, repair on any tank other than metal</p> <p>iii) missing, cracked, broken, loose, fasteners missing or loose</p> <p>iv) cracked, broken, loose, inappropriate substitute (i.e. chain)</p>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
v) lines	v) cracked, chafing, leaking, insecurely mounted, frayed, cracked to cord layer – steel braided lines are rusted at steel layer – not approved type
vi) pump	vi) level 1 leak, insecurely mounted, physically damaged
	<b><u>OUT OF SERVICE</u></b>  i) <b>Level 1 leak at any point, including auxiliary equipment.</b> ii) <b>Fuel cap missing.</b> iii) <b>Tank(s) insecure (tanks mounted with cushioning devices will have some movement).</b>
b) securement  i) mounts	i) missing, cracked, broken, loose fasteners – missing or loose, broken welds
<b>13. Bumper</b> <span style="float: right;">Truck   ✓   Trailer     Bus   ✓  </span>	
<b>NOTE: Applies only to the front bumper on a truck or truck-tractor. Applies to the front and rear bumper on a bus.</b>	
a) condition	a) broken, loose or missing – any section has exposed sharp edge, is torn or protrudes in a manner that could be hazardous to the driver, a passenger, pedestrian or cyclist
b) design	b) replacement part does not meet OEM standard, or is weaker than OEM design – solid portion does not extend from one frame rail to the other (except for a unitized body design)
c) height	c) lowest part of front bumper higher than 750 mm (29.5 in.) from ground or OEM


All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
	<p><b><u>OUT OF SERVICE</u></b></p> <p>i) <b>Imminent failure appears likely.</b></p> <p>ii) <b>Any section has exposed sharp edge, is torn or protrudes in a manner that could be hazardous to the driver, a passenger, pedestrian or cyclist.</b></p>
<b>14. Windshield</b>	<b>Truck   ✓     Trailer         Bus   ✓  </b>
<p>a) obstruction</p> <p><b>NOTE: Forward/rearward facing camera safety devices may be mounted up to 50 mm from the outer edge of the area swept by OEM wipers.</b></p> <p><b>NOTE: Wipers must be OEM length.</b></p> <p>b) crack</p> <p><b>NOTE: See following image for examples of pass and fail windshield crack conditions.</b></p>	<p>a) decal or device obscures vision in the area swept by OEM windshield wipers</p> <ul style="list-style-type: none"> <li>– clouded, damaged or deteriorated in such a way that driver's normal vision is materially impaired in the area swept by OEM windshield wipers</li> <li>– aftermarket tinting</li> <li>– tint or sunscreening other than that allowed by ANSI/SAE Z26.1 standards</li> </ul> <p>b) a crack extends through both layers of glass</p> <ul style="list-style-type: none"> <li>– a crack of any length extends more than 50 mm within the area swept by OEM windshield wipers</li> <li>– a crack over 300 mm (12 in.) long in any part</li> </ul>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.



Item and Method of Inspection	Reject If
-------------------------------	-----------

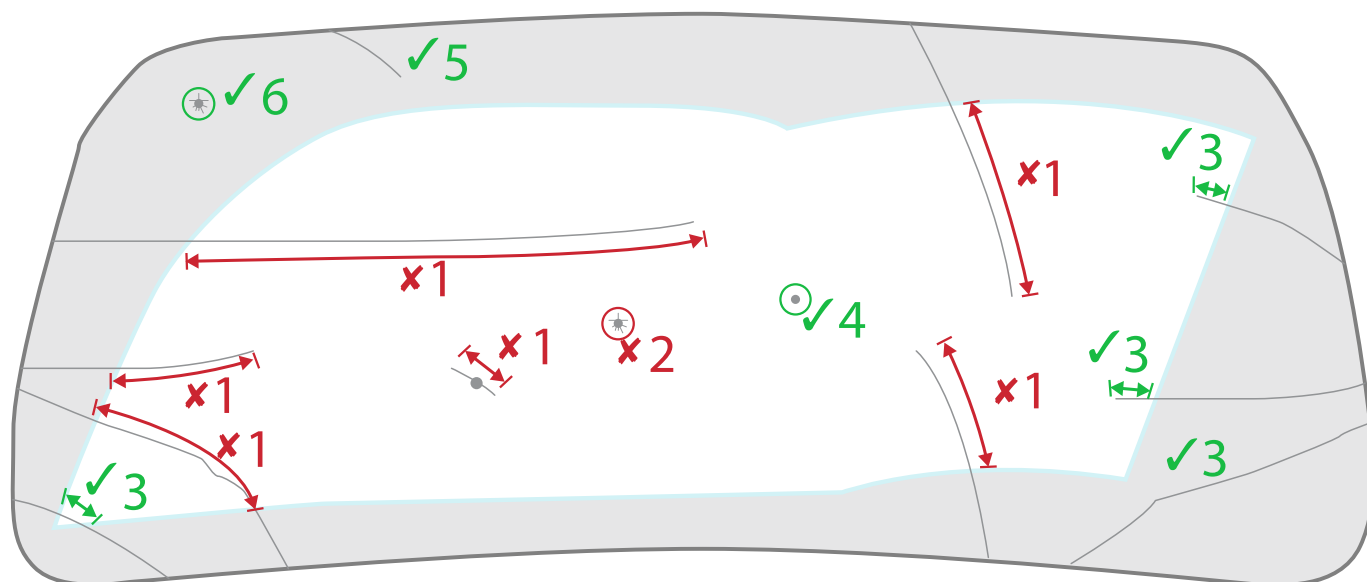

### Examples of Windshield Pass and Reject Conditions:

Reject condition 1	Crack through one layer that extends more than 50 mm into the area swept by wipers
Reject condition 2	Star chip larger than 13 mm in diameter in area swept by wipers
Pass condition 3	Crack extends less than 50 mm into the area swept by wipers
Pass condition 4	Star chip smaller than 13 mm in diameter in area swept by wipers
Pass condition 5	Crack through one layer that is more than 50 mm long, but outside the area swept by wipers
Pass condition 6	Star chip larger than 13 mm in diameter, but outside the area swept by wipers

c) chip

c) a chip that is larger than 13 mm in diameter within the area swept by OEM windshield wipers

d) discolouration

d) more than 10% of total glass area is discoloured due to age or other deterioration

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
e) tinting	e) tint or sunscreening other than that allowed by the original vehicle manufacturer <ul style="list-style-type: none"> <li>– after market tinting extends more than 75mm (3 in.) from top of windshield</li> <li>– any tint is of a silver or reflective type</li> </ul>
f) material type	f) is not marked as type AS-1 or AS-10 BUS ONLY – not marked as type AS-1 or AS-10 or AS-20
g) condition	g) missing <ul style="list-style-type: none"> <li>– vision is obscured or limited due to surface condition</li> </ul>
	<b><u>OUT OF SERVICE</u></b> <p>i) Windshield is missing.</p> <p>ii) Windshield is damaged or deteriorated in such a way that driver's normal vision is materially impaired in the area swept by OEM windshield wipers.</p>
<b>15. Side Windows</b> Truck   ✓   Trailer     Bus	
a) operation	a) cannot be opened or closed readily on driver's side <ul style="list-style-type: none"> <li>– emergency and driver's window cannot be opened or closed readily</li> </ul>
b) condition	b) cracked in such a way as to restrict vision, broken, single pane glass cracked, dual pane windows cracked on inside, exposed sharp edges <ul style="list-style-type: none"> <li>– cracked or stone bruised through both layers of glass</li> <li>– exposed edges not banded</li> <li>– Not equipped per OEM</li> <li>– glass pane or frame insecure</li> </ul>
c) type	
c1) front side windows	c1) other than safety glass type AS-1, 2, 10 & 11
c2) rear side and rear window	c2) other than safety glass type AS-1, 2, 3, 10 & 11

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
d) tinting	d) any tinting (by film) of any driver's side window or front passenger side window <ul style="list-style-type: none"> <li>– any tinting on a rear window if the motor vehicle is not equipped with outside rear-view mirrors on the left and right side of the motor vehicle</li> <li>– any film is a reflective (silvered) type</li> <li>– aftermarket tinting or sunscreening on driver's side windows other than that allowed by ANSI/SAE Z26.1</li> </ul>
	<b><u>OUT OF SERVICE</u></b>  i) <b>Emergency exits cannot be opened.</b>
<b>16. Rear Window</b> <span style="float: right;">Truck   ✓   Trailer     Bus   ✓  </span>	
a) condition  b) material type  <b>NOTE: Rigid material may be used in place of glass or rigid plastic, when the vehicle is equipped with an outside rear-view mirror on each side.</b>	a) broken or exposed sharp edge  b) is not marked as glass type AS-1, AS-2, AS-10 or AS-11, or rigid plastic AS-4 or AS-5
<b>17. Interior Sun Visor</b> <span style="float: right;">Truck   ✓   Trailer     Bus   ✓  </span>	
a) location  b) attaching parts  c) adjustment  d) modified or non-OEM sun visor on a school bus	a) missing on driver's side  b) bent, broken, loose or missing  c) cannot be maintained in a set position  d) does not meet applicable standard
<b>18. Exterior Windshield Sun Visor</b> <span style="float: right;">Truck   ✓   Trailer     Bus   ✓  </span>	
a) obstructed view	a) any part of an exterior visor, at any point: <ul style="list-style-type: none"> <li>i) extends more than 150 mm below the upper edge of the windshield</li> </ul>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
-------------------------------	-----------

Figure 1

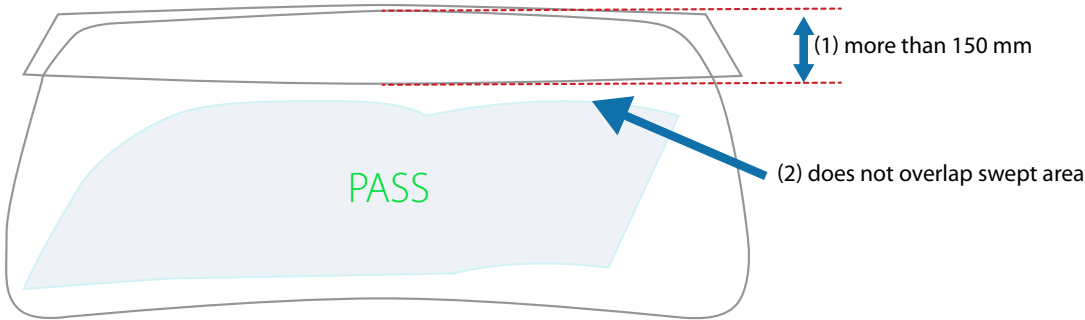


Figure 2

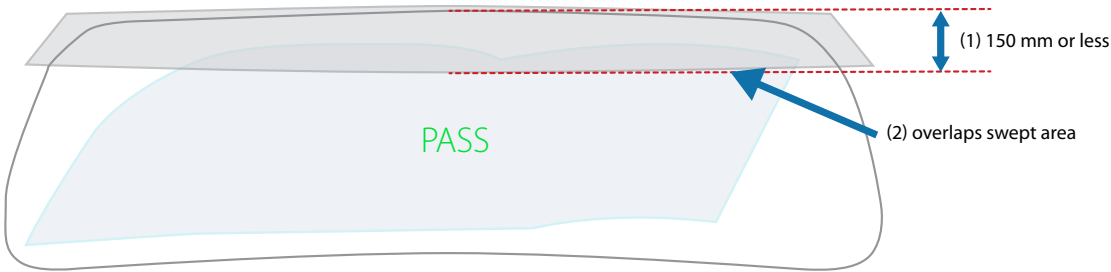


Figure 3


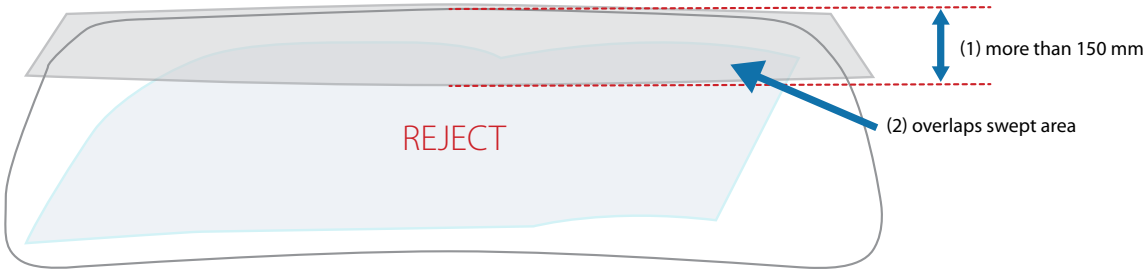


Figure 4

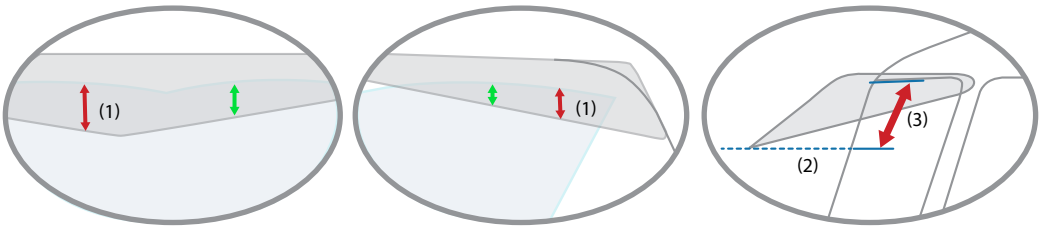

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
<p>Sun Visor Measurement Location and Method:</p> <ol style="list-style-type: none"> <li>1. Identify the location where the sun visor vertically overlaps furthest over the swept area of the wiper.</li> <li>2. Extend a level line to the surface of the windshield from the location identified in step (1).</li> <li>3. Measure upwards along the surface of the windshield.</li> </ol> <p><b>NOTE: “Swept area” means the portion of the windshield swept by an OEM wiper blade attached to an OEM wiper arm.</b></p>	<ul style="list-style-type: none"> <li>– reject if measurement is greater than 150 mm</li> </ul>
	<p><b><u>OUT OF SERVICE</u></b></p> <p>i) <b>Any part of an exterior visor, at any point:</b></p> <ul style="list-style-type: none"> <li>– <b>extends more than 150 mm below the upper edge of the windshield; and</b></li> </ul>
<b>19. Rear-view Mirror</b>	<b>Truck   ✓   Trailer     Bus    </b>
<p>From driver’s position:</p> <ol style="list-style-type: none"> <li>a) location</li> <li>b) view</li> <li>c) mounts</li> <li>d) glass condition</li> <li>e) area of each mirror</li> </ol>	<ol style="list-style-type: none"> <li>a) none located on the left side <ul style="list-style-type: none"> <li>– none located on the right side if not equipped with unobstructed rear window with inside mirror</li> </ul> </li> <li>b) not a clear view of highway to rear <ul style="list-style-type: none"> <li>– obstructed</li> </ul> </li> <li>c) loose, broken, insecure <ul style="list-style-type: none"> <li>– will not allow the mirror to maintain adjustment</li> </ul> </li> <li>d) cracked, pitted, clouded as to obscure vision</li> <li>e) less than 325 cm<sup>2</sup> (50 in<sup>2</sup>) (measurement approximate) on vehicles greater than 4,536 kg and includes convex mirror when installed on surface</li> </ol>
<b>20. Interior Rear-view Mirror on a Bus</b>	<b>Truck     Trailer     Bus   ✓  </b>
<ol style="list-style-type: none"> <li>a) presence</li> <li>b) view</li> </ol>	<ol style="list-style-type: none"> <li>a) missing</li> <li>b) obstructed, not clear view of the interior and rear of bus</li> </ol>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
c) mounts	c) loose, broken, insecure
d) glass condition	d) cracked, pitted or broken as to obscure vision, not safety glass and so marked (buses must meet applicable D-250 standard for year of manufacture)
e) adjustment	e) will not maintain adjustment, not adjustable
<b>21. Bus Exterior Rear-view Mirrors</b> Truck     Trailer     Bus   ✓	
a) left and right side rearview mirrors	
i) presence	i) either one missing
ii) view	ii) not a clear view of highway to rear – obstructed
iii) mounts	iii) loose, broken, insecure
iv) glass condition	iv) cracked or pitted so as to obscure vision
v) area	v) less than 0.03 m <sup>2</sup> (50 in <sup>2</sup> ) on vehicles over 2.05 m (80 in.) in width – less than 16,000 mm <sup>2</sup> (24 in <sup>2</sup> ) on vehicles 2.05 m (80 in.) or less in width
vi) location	vi) creates blind spot
vii) adjustment	vii) will not maintain adjustment
	<b><u>OUT OF SERVICE</u></b>
	<b>i) Missing, obscured or insecure or seized.</b>
<b>22. Passenger Seat</b> Truck   ✓   Trailer     Bus	
a) condition	a) mounted insecurely, loose, frame broken, covering material torn and exposing a metal component or spring, seat pedestal removed or seat assembly not OEM or CMVSS equivalent
b) seat track locks	b) adjusting mechanism does not operate, adjustable seats will not lock into position, loose

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
c) seat back locks	c) missing, loose, broken, inoperative, do not hold seat back in locked position
d) head restraints (headrest) if OEM equipped	d) missing, broken, does not function as OEM, not CMVSS compliant
e) location	e) not in OEM, certified or CMVSS compliant location
<b>23. Drivers seat</b> <span style="float: right;">Truck   ✓   Trailer     Bus   ✓  </span>	
a) condition	a) mounted insecurely, loose, frame broken <ul style="list-style-type: none"> <li>– springs exposed and/or broken, cover material removed</li> <li>– material torn more than 75 mm (3 in.) in length or 6,400 mm<sup>2</sup> (9 in<sup>2</sup>) in area or 6.5 mm (1/4 in.) deep</li> <li>– adjusting mechanism does not operate, will not lock in position</li> <li>– driver cannot reach all controls</li> </ul>
b) seat track locks	b) driver's seat adjustment mechanism does not operate <ul style="list-style-type: none"> <li>– adjustable seats will not lock into position</li> </ul>
c) location	c) not in OEM, certified or CMVSS compliant location <ul style="list-style-type: none"> <li>– missing, broken, does not function as OEM, not CMVSS compliant</li> </ul>
d) head restraints (headrest) if OEM equipped	
	<b><u>OUT OF SERVICE</u></b>
	<b>i) Driver's seat is rejected or defective.</b>
<b>24. Seat Belt/Occupant Restraint</b> <span style="float: right;">Truck   ✓   Trailer     Bus   ✓  </span>	
Seat belts and occupant restraint system must comply with CMVSS 208, 209 and 210 for year of manufacture.  Additional Inspection Procedure(s): Confirm the operation of each seat belt latch and retractor.	

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
<p>a) type and condition</p> <p>b) anchor</p> <p>c) retractor</p> <p>d) belt release and buckle</p> <p>Additional Inspection Procedure(s): Buckle each seatbelt assembly and extend the belt to test the belt retractor.</p> <p>e) supplemental restraint system (SRS)</p> <p>Additional Inspection Procedure(s): Cycle the ignition off and on and check the status of the SRS indicator lamps.</p> <p>f) pre-tensioner and load limiter</p>	<p>a) missing or not equipped at each seating position as originally required to meet applicable CMVSS</p> <ul style="list-style-type: none"> <li>– webbing material is broken, cut frayed or torn</li> <li>– air ride, hydraulic or spring seat does not have lap belts attached to the seat, or is not equipped with a secondary belt from the seat to the floor</li> <li>– compliance label missing</li> </ul> <p>b) broken, insecure mounting or missing</p> <ul style="list-style-type: none"> <li>– location in non OEM position</li> </ul> <p>c) broken, insecure mounting or missing</p> <ul style="list-style-type: none"> <li>– fails to allow belt to extend to its maximum length or fails to retract properly</li> </ul> <p>d) broken, insecure mounting or missing</p> <ul style="list-style-type: none"> <li>– any part is not properly attached to the belt material</li> <li>– latch fails to lock in position or fails to release easily when belt is under tension</li> </ul> <p>e) an air bag is disconnected, inoperative, missing or not re-installed to OEM service instructions</p> <ul style="list-style-type: none"> <li>– the air bag indicator (SRS) lamp indicates a malfunction or fails to operate according to OEM service instructions</li> <li>– air bag has been deactivated permanently without a provision to turn off and on by a key lock, or does not have an illuminated message to indicate when the air bag has been switched off</li> </ul> <p>f) pre-tensioner has been activated and system not repaired or replaced to meet OEM standard</p> <ul style="list-style-type: none"> <li>– load limiter has been activated and system not repaired or replaced to meet OEM standard</li> </ul>
	<p><b><u>OUT OF SERVICE</u></b></p> <p><b>i) A required seat belt is inoperative or missing.</b></p>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.



Item and Method of Inspection	Reject If
<b>25. Fender/Mudflaps</b>	Truck   ✓   Trailer   ✓   Bus   ✓
<p><b>NOTE:</b> A mud flap is required behind every wheel or axle group, where the full width of the tire is not enclosed by a body element, such as a fender, down at least as far as the wheel's horizontal centre line. Unless exempt as noted below, the mud flap must meet the following dimensions when the vehicle is not loaded/laden.</p> <p>Mud flap width – at least as wide as the tires.</p> <p>Bottom of mud flap – no more than 210 mm (8.25”) from the ground.</p> <p>Top of mud flap – must extend upward at least as high as the top of the tire(s), or up to a body element that extends below the top of the tire.</p> <p><b>Mud flap exemptions:</b></p> <p>A mud flap is not required where the body overhang is more than three times the underbody height.</p> <p><b>Overhang = (A)</b> the distance from the vertical centre line of the tire to the end of the body</p> <p><b>Underbody height = (B)</b> the distance from the bottom of the body overhang to the ground</p> <p><b>Mud flap exemption for unique or highly specialized vehicles:</b></p> <p>Where there is inadequate room for a full-size mud flap, or where the mud flap will interfere with vehicle mechanical operation, variances from the standards may be considered.</p> <p>Authorized inspectors must ensure where a unique or specialized vehicle does not meet the required mud flap standards, that the spray and splash of water and mud to the rear of the vehicle is minimized as required by Motor Vehicle Act Regulation Division 7.06 – Mudguards.</p> <p>Specific questions should be directed to your local Area Vehicle Inspector.</p>	<p>The diagram consists of two parts. The top part shows a top-down view of a wheel (a black ring) with a horizontal dashed red line passing through its center, labeled 'Horizontal center line of a wheel' with a blue double-headed arrow. The bottom part shows a side view of a vehicle body (a blue horizontal bar) with a wheel (a blue circle) below it. A horizontal double-headed arrow above the body is labeled 'Overhang (A)'. A vertical double-headed arrow between the bottom of the body and the ground is labeled 'Underbody Height (B)'.</p>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
a) condition and location	a) fender or mud flap is broken, has insecure mounting, is loose or missing <ul style="list-style-type: none"> <li>– fender or mud flap has a tear or wear hole exists that is larger than 100 mm across the longest dimension, or the aggregated longest dimensions of multiple holes in a single mud flap equal more than 100 mm</li> <li>– the distance from the bottom of the mud flap to the ground exceeds 210 mm</li> <li>– the mud flap does not cover the full tread width of the tire(s)</li> <li>– the top of the mud flap does not reach up to the top of the tires or a body element</li> </ul>
	<b><u>OUT OF SERVICE</u></b>  <b>i) Required mud flap is missing.</b>
<b>26. Landing Gear on Trailer</b> <div>Truck     Trailer   ✓   Bus    </div>	
a) operation  Additional Inspection Procedure(s): Test the operation of the landing gear in all speed settings.	a) binding, inoperative or seized
b) condition	b) landing gear or brace is bent, broken or cracked <ul style="list-style-type: none"> <li>– insecure mounting</li> <li>– pad broken, insecure or loose, or missing</li> </ul>
c) crank handle	c) cannot be stowed or secured so that it remains within the outer dimensions of the vehicle
	<b><u>OUT OF SERVICE</u></b>  <b>i) Any part of the landing gear is insecure or loose or so as to become detached from vehicle.</b>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Page 315

Item and Method of Inspection	Reject If
	<p><b><u>OUT OF SERVICE</u></b></p> <p>i) More than one-fourth of the slider locking pins or locking pin holes that are in use have any one of the following conditions:</p> <ul style="list-style-type: none"> <li>a. locking pin is missing or not engaged</li> <li>b. locking-pin hole measures more than 25 mm larger than its original size</li> <li>c. the material from the hole in use to an adjacent hole, or the material from the hole in use to the edge of the rail, is torn or split</li> </ul> <p>ii) More than one-fourth of the slider-guide/hold- down brackets are missing or disengaged.</p> <p>iii) The sliding suspension attachment member (undercarriage body rail) on either side has a crack of any length in more than 50 percent of its attachment welds.</p> <p>iv) A sliding suspension member's (undercarriage body rail) attachment welds are cracked completely through along a 1.2 m continuous length of the body rail.</p> <p>v) A sliding suspension attachment member (undercarriage body rail) is cracked completely through along a 1.2 m continuous length.</p>
<b>28. Aerodynamic Device and Attachment</b>	Truck   ✓   Trailer   ✓   Bus   ✓
a) condition and security	<p>a) insecure or loose</p> <ul style="list-style-type: none"> <li>– any section has exposed sharp edge, is torn or protrudes out that could be hazardous to driver, passenger, pedestrian or cyclist</li> </ul>
	<p><b><u>OUT OF SERVICE</u></b></p> <p>i) Aerodynamic device is so insecure or loose it is likely to become detached from the vehicle.</p> <p>ii) Any section has exposed sharp edge, is torn or protrudes out that could be hazardous to driver, passenger, pedestrian or cyclist.</p>


All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
<b>29. Rear Impact Guard (RIG) on a Trailer</b>	Truck     <b>Trailer</b>   ✓   Bus
<p><b>NOTE: Every trailer with a GVWR of 4,536 kg or greater manufactured on or after September 1, 2007, except as noted below, must be fitted with a rear impact guard (RIG) that meets the requirements of CMVSS 223.</b></p> <p>Trailers not required by CMVSS to have RIG include:</p> <ul style="list-style-type: none"> <li>• pole trailer</li> <li>• pulpwood trailer</li> <li>• wheels-back trailer</li> <li>• trailer designed to be used as temporary living quarters</li> <li>• low chassis trailer</li> <li>• trailer designed to interact with, or having, work performing equipment located in or moving through the area that would be occupied by a RIG</li> </ul> <p>a) dimensions</p> <p><b>NOTE: All RIG dimensions are based on the trailer being in an unloaded condition, suspension at normal ride height and tires properly inflated.</b></p> <p>b) condition</p> <p><b>NOTE: Multiple bends are permitted.</b></p> <p><b>When there is visible damage to the RIG, also carefully inspect the trailer frame and floor for structural damage.</b></p>	<p>a) RIG does not conform to dimensions shown in figure 1 below (based on industry standard – TMC RP 732)</p> <p>b) broken, loose or missing</p> <ul style="list-style-type: none"> <li>– has cracked welds in the horizontal or vertical member or in the supporting structure or any attachment to vehicle structure</li> <li>– the horizontal member is bent inward, downward, upward or outward, beyond 75 mm as shown in figure 2 below</li> <li>– the vertical supports and/or supporting structure are weakened, bent or distorted (See figure 3 below)</li> </ul>


All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
-------------------------------	-----------


**Figure 1** – Rear Impact Guard Dimensions

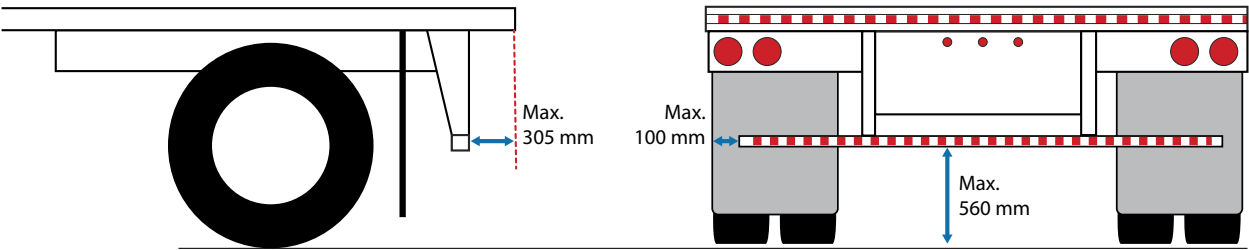

**Figure 2** – Limits of Damage to Horizontal RIG Member

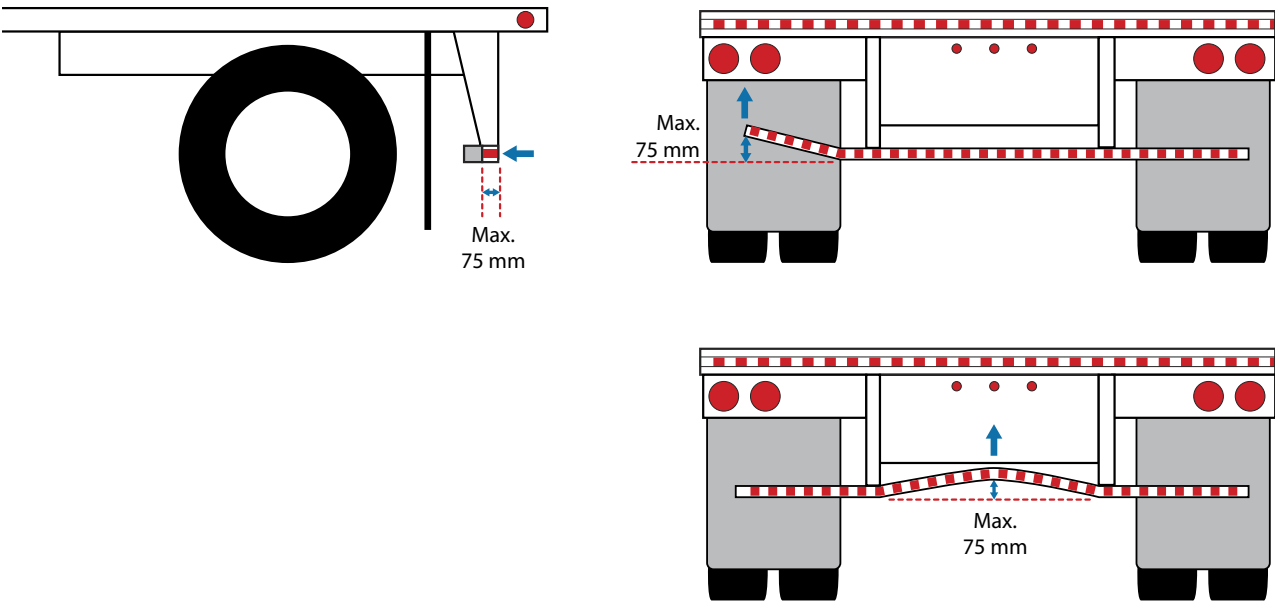

**Figure 3** – Example of Damaged Vertical RIG Member

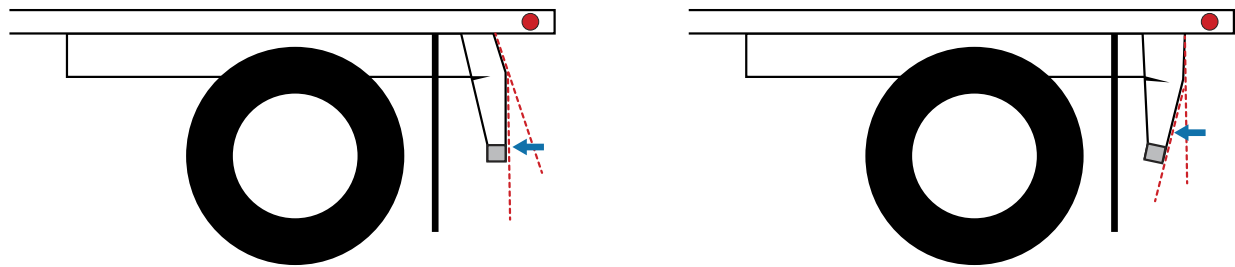

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
	<b><u>OUT OF SERVICE</u></b>
	i) Any part of the RIG is so insecure or loose it is likely to become detached from the vehicle.
<b>30. Floor Plan/Baggage Floor/Step Well on a Bus</b>	Truck     Trailer     Bus   ✓
a) floor condition	a) bent or deformed in a way that causes unevenness in any aisle, improper attachment of any seat or interferes with any system or control <ul style="list-style-type: none"> <li>– cracked, split or has any non-manufactured hole that is not properly patched rusted or corroded sufficiently to result in structural weakness</li> <li>– allows exhaust gases to enter occupant compartment</li> <li>– any rivet is loose or missing</li> </ul>
b) floor covering <b>NOTE: Slip resistant covering is required on the passenger compartment floors and aisles of all buses. Floor covering is not required in baggage areas.</b>	b) cracked, torn or worn through, or not sealed at seams <ul style="list-style-type: none"> <li>– loose or curled and posing a tripping hazard</li> <li>– missing or improper type</li> <li>– not a smooth surface material under the seats</li> <li>– on a school bus, not a ribbed surface material in the aisle, or</li> <li>– required ribbed surface of floor covering is worn smooth</li> </ul>
c) step well condition <b>NOTE: Slip resistant covering is required on all step tread surfaces.</b>	c) bent or deformed in a way that causes unevenness on any step surface <ul style="list-style-type: none"> <li>– cracked, split or has any non-manufactured hole that is not properly patched</li> <li>– rusted or corroded sufficiently to result in structural weakness</li> <li>– nose of tread does not have band of contrasting colour (only applicable where a contrasting colour was originally equipped by OEM)</li> </ul>
d) step-well light	d) missing, not functioning as OEM

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
<b>31. Interior Body and Fixtures on a Bus</b>	Truck       Trailer       <b>Bus</b>   ✓
a) stanchion and guard rail  b) grab handle  c) retainer barrier on a school bus  <b>NOTE: A school bus must be equipped with a seat or retainer barrier forward of each passenger seat. A seat acts as a retainer barrier to the seat immediately behind it.</b>  d) metal condition	a) OEM equipped stanchion is missing <ul style="list-style-type: none"> <li>- loose, support or fastener missing</li> <li>- energy absorbing material is missing and exposing any area of metal with the longest dimension greater than 25 mm</li> <li>- energy-absorbing material deeper than 6 mm, is missing on any one element, on one or more sections that equal more than 100 mm, when the longest dimension of all such areas are added together</li> </ul> b) OEM equipped grab handle is missing <ul style="list-style-type: none"> <li>- broken or loose</li> <li>- on a school bus, drawstring block or security block (that prevents draw strings from being caught) is missing</li> </ul> c) missing, not located forward of any seat <ul style="list-style-type: none"> <li>- any part is not padded on the rear face on the upper 300 mm</li> </ul> d) any metal is torn in a way that could be hazardous to a person
<b>32. Service and Exit Door on a Bus</b>	Truck       Trailer       <b>Bus</b>   ✓
a) condition and operation  Additional Inspection Procedure(s): Test the operation of each door.	a) binds or fails to lock securely <ul style="list-style-type: none"> <li>- insecure mounting, or severely corroded in hinge area</li> <li>- panel is corroded through</li> <li>- welded or repaired in a way that does not meet OEM standard</li> <li>- door fails to operate or fails to latch on both primary and secondary latches</li> <li>- gap exists that allows exhaust gases to enter occupant compartment</li> </ul>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.



Item and Method of Inspection	Reject If
b) door openers and handles  c) remote door operator  d) door edge material  e) window of school bus door <b>NOTE: Applies to school bus only.</b>	b) broken, inoperative or missing <ul style="list-style-type: none"> <li>– catch or latch is broken, loose or missing</li> </ul> c) inoperative, missing or not equipped <ul style="list-style-type: none"> <li>– binds, jams or malfunctions</li> <li>– manual override device on power operated door is inoperative or missing</li> <li>– control is not accessible from seated driving position</li> </ul> d) material is loose or torn <ul style="list-style-type: none"> <li>– strip seal along the bottom edge of the door is missing or torn</li> <li>– missing or improper type of material</li> </ul> e) has fog or visible moisture between panes Fails to meet any of the following requirements: <ul style="list-style-type: none"> <li>– OEM type and size</li> <li>– double paned or equipped with a means of keeping glass clear of frost</li> <li>– marked as type AS-1, AS-2, AS-10 or AS-11</li> </ul>
	<b><u>OUT OF SERVICE</u></b>  <b>i) Door is inoperative or fails to remain in the closed position.</b>

**33. Emergency Exit (Door, Window and Roof Hatch) on a Bus**

Truck | | Trailer | | Bus | ✓ |

**NOTE: School buses must meet Applicable CSA D250 for year of Manufacture.**

## a) condition and operation

Additional Inspection Procedure(s):  
Confirm that each exit (door, window and roof hatch) opens, closes and latches as intended.

## a) passage to any emergency exit door is blocked

- release or latch fails to operate normally from the inside or outside
- hinge fails to operate normally
- fails to open fully and smoothly
- emergency exit door hold mechanism does not operate as required per applicable CSA D250 standard

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
b) label and signage <b>NOTE: Inspection must be conducted according to the applicable requirements.</b>	b) fails to display required label or sign identifying emergency exit <ul style="list-style-type: none"> <li>– fails to display required label or sign displaying operating instructions</li> </ul>
c) emergency door and roof hatch	c) interlock system on emergency door or roof hatch fails to operate as intended
d) emergency exit window warning on a school bus	d) warning device inoperative or missing on emergency window
	<b><u>OUT OF SERVICE</u></b>  i) <b>Required and or marked emergency exits are inoperative, missing, or obstructed.</b>  ii) <b>Vehicle operates with emergency door locked.</b>

**34. Passenger Compartment Window on a Bus (Except Emergency Exit Window)**      Truck |   |   Trailer |   |   Bus | ✓ |

**NOTE: School buses must meet Applicable CSA D250 for year of Manufacture.**

**NOTE: Items a), b) and c) below apply to all passenger compartment side windows.**

a) operation

Additional Inspection Procedure(s):  
Test the operation of each opening side window.

b) condition

c) material type

a) fails to open, close or latch as intended

b) broken, exposed sharp edge, single pane glass is cracked or dual pane window is cracked on inside

- exposed edge is not banded
- on a school bus, double-paned windows or windows equipped with frost shields, are not fitted where required by the applicable requirements
- push out windows do not latch and release when handle in selected position

**NOTE: double paned glass is on many bus entrance door glass and drivers side windows**

c) not marked as one of the two material listed below:

- glass type AS-1, AS-2, AS-3, AS-10 or AS-11
- rigid plastic type AS-4, AS-5 or AS-12

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
d) window tint  <b>NOTE: This item applies only to the windows directly to the left and right of the driver.</b>  e) window tint on a school bus	d) aftermarket tint or sun screen is applied to the windows directly to the left and right of the driver (including windows in doors)  e) aftermarket tint or sun screen is applied to any window that is required to be double-paned
<b>35. School Bus Exterior Mirror (Except Standard Left and Right Side Mirror)</b> <span style="float: right;">Truck     Trailer     Bus   ✓  </span>	
<b>NOTE: School buses must meet Applicable CSA D250 for year of Manufacture.</b>  a) left and right side convex rear-view mirror  b) cross-over convex mirror  <b>NOTE: A school bus manufactured after Nov. 29, 1997 requires two cross-over mirrors.</b>  c) mirror heating and controls  Additional Inspection Procedure(s): Test the operation of exterior mirror heaters.  <b>NOTE: Confirm compliance based on vehicle age with the applicable requirements. Any amount of heat produced by the mirror is sufficient to indicate functionality.</b>	a) required convex mirror is broken, insecure, loose, missing  b) not equipped with required (one or two) fender-mounted (OEM or equivalent) cross-over mirrors <ul style="list-style-type: none"> <li>– mirrors fail to provide the driver with the required view of the front, and front-left and front-right sides of the school bus</li> <li>– mirror, or mirror mounting, is insecure or loose, or fails to maintain adjustment</li> <li>– power operated mirror fails to operate as intended</li> <li>– mirror is broken, cracked or pitted, on an aggregated area larger than 5% of the mirror surface</li> <li>– has any condition that deteriorates, or interferes with, the normal view from the mirror</li> </ul> c) does not function as intended
	<b><u>OUT OF SERVICE</u></b>  <b>i) Mirror is insecure, loose, missing, obscured or seized.</b>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
<b>36. Passenger Seat on a Bus</b>	Truck     Trailer     Bus   ✓
<p>1) passenger seat location and position must be in compliance with the Motor Vehicle Safety Act (Canada) or FMVSS; and</p> <p>2) seating capacity must be in compliance with the Motor Vehicle Safety Act (Canada) or FMVSS</p> <p>Additional Inspection Procedure(s): Manually check the condition and security of each passenger seat.</p> <p>a) frame and mounting</p> <p>b) seating surface</p> <p>c) seat back and barrier surface</p> <p>d) seat spacing [SCHOOL BUS ONLY]</p>	<p>1) seat location or position not in compliance with standards</p> <p>2) seating capacity exceeds maximum number indicated by the vehicle primary or secondary manufacturer</p> <p>a) broken, loose or not securely attached to the floor or wall as required</p> <p>b) covering material is torn, exposing the seat base or springs</p> <ul style="list-style-type: none"> <li>– padding or energy absorbing material thickness is reduced by more than 25%, over an aggregated area greater than 10% of the seating surface</li> <li>– a tear in the covering is longer than 75 mm</li> <li>– covering has a hole, or covering is missing, where the longest measurement across the area is more than 100 mm</li> <li>– on a school bus, seat bottom is not secured to the frame</li> </ul> <p>c) loose or missing</p> <ul style="list-style-type: none"> <li>– a tear in the covering is longer than 75 mm</li> <li>– covering has a hole, or covering is missing, where the longest measurement across the area is more than 50 mm</li> <li>– energy-absorbing material is reduced in thickness by more than 25%, where the longest measurement across the area is more than 75 mm</li> </ul> <p>d) exceeds 737 mm (29 in.) center to center</p>
	<p><b><u>OUT OF SERVICE</u></b></p> <p><b>i) Seat frame not bolted to floor.</b></p>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
<b>37. School Bus Body Exterior</b>	Truck     Trailer     Bus   ✓
<p><b>NOTE: Applies to school bus only as per D250 requirements for year of manufacture.</b></p> <p>a) paint</p> <p>b) rub rail</p> <p>c) signs</p> <p>d) stop arm and control</p> <p>Additional Inspection Procedure(s): Actuate the stop arm control to confirm it operates in the manner intended by the manufacturer.</p> <p>e) stop arm lamp</p> <p>Additional Inspection Procedure(s): Check in conjunction with stop arm.</p> <p>f) pedestrian crossing arm</p> <p>Additional Inspection Procedure(s): Actuate the pedestrian crossing arm to confirm it operates in the manner intended by the manufacturer.</p>	<p>a) body is not the required colour</p> <ul style="list-style-type: none"> <li>– hood is not the required colour</li> <li>– bumper is not the required colour</li> </ul> <p>b) broken, corroded, cracked, loose or torn sections, missing, removed, repaired other than industry standard</p> <ul style="list-style-type: none"> <li>– any rivet is loose or missing</li> <li>– bent and protruding from the side of the bus</li> <li>– does not comply with applicable CSA D250 standard for year of manufacture</li> </ul> <p>c) any required sign is missing, not clearly visible and legible, damaged or fails to comply with an applicable requirement of the relevant jurisdiction</p> <p>d) fails to operate in the intended manner</p> <ul style="list-style-type: none"> <li>– red paint has faded to less than 70% of original intensity (minimum intensity is equivalent to Pantone® PMS 7607U)</li> </ul> <p><b>NOTE: Use an industry standard colour-reference chart as necessary.</b></p> <p>e) inoperative or fails to comply with an applicable requirement of the relevant jurisdiction</p> <p>f) bent, broken or inoperative</p> <ul style="list-style-type: none"> <li>– incorrect length</li> </ul>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.

Item and Method of Inspection	Reject If
	<p><b><u>OUT OF SERVICE</u></b></p> <p>i) Rub rail is protruding from the side of the bus.</p> <p>ii) Any section has exposed sharp edge, is torn or protrudes out in a manner that could be hazardous to driver, passenger, pedestrian or cyclist.</p>
<b>38. Auxiliary Compartment on a Bus</b>	Truck     Trailer     Bus   ✓
<p>a) access and baggage doors</p> <p>Additional Inspection Procedure(s): Operate all baggage compartment doors.</p> <p>b) passenger compartment baggage area partition</p> <p>c) overhead shelf/parcel rack</p>	<p>a) fails to open or close normally</p> <ul style="list-style-type: none"> <li>– latch fails to hold</li> <li>– hinge is broken, inoperative, missing or seized</li> <li>– hinge mounting area is insecure</li> <li>– counter balance cable is frayed or will not maintain open position</li> </ul> <p>b) does not have a securely attached barrier, separating baggage from occupant seating area</p> <p>c) insecure or loose</p> <ul style="list-style-type: none"> <li>– mounting fastener is broken, insecure or missing</li> <li>– has no means of preventing articles from unintentionally falling out</li> </ul>
	<p><b><u>OUT OF SERVICE</u></b></p> <p>i) Access or baggage door latch fails to hold door in closed position.</p>
<b>39. Load Securement Points</b>	Truck   ✓   Trailer   ✓   Bus
<p>a) attachment points</p> <p>b) securement equipment</p>	<p>a) cracked, elongated or broken</p> <p>b) inoperative</p>

All inspection procedures are visual unless additional inspection procedures are indicated or where applied force is necessary to verify tightness and/or component security.